

i Series Touch Panel USB Cable Notification


USB cable specification: HI-SPEED USB Revision 2.0 SHIELDED 24AWG


Notice:

- 1、 The USB port of PC must support USB2.0 standard;
- 2、 The USB cable should be shielded with 2 layers: Aluminium foil shield + net shield;



- 3、 The length of USB cable shouldn't be too long. 1 meter of length is good;
- 4、 If a desktop is used, the USB cable should be plugged into the back panel instead of the front, since that the extension line connected between main board and the front panel USB port usually doesn't have any shield;
- 5、 If download cannot be performed, it might be caused by the incompatible USB driver on PC. You can try it on another PC; or go to Computer Management/Device Manager for checking USB driver is installed correctly as below illustration.

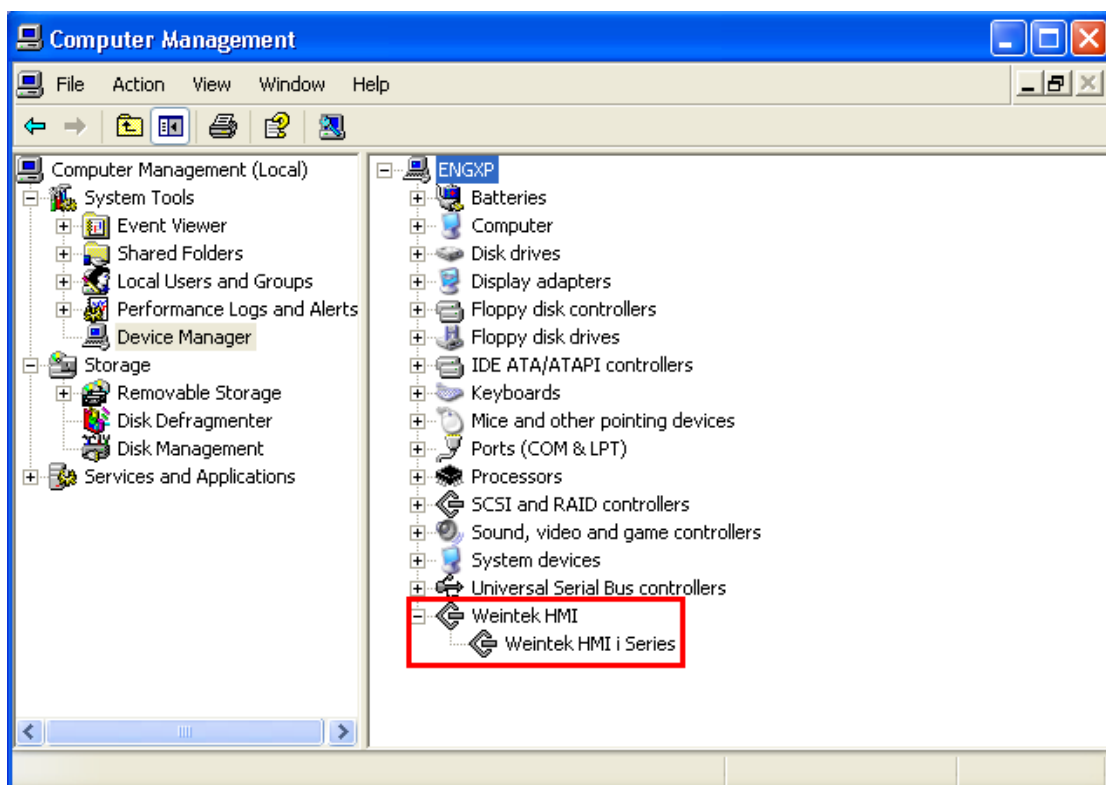

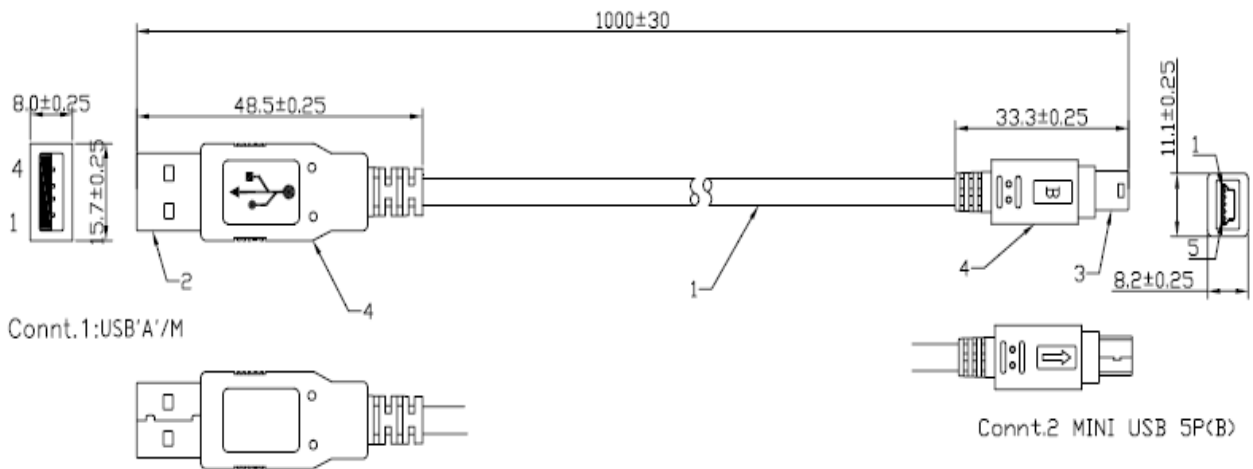

ELECTRICAL PROPERTIES:

1. 100% OPEN SHORT MIS-WIRE TEST
2. Contact Resistance: 10ohm
3. Insulation Resistance: 5Mega ohm
4. Hi-Pot: 300V/10ms

Pin Assignment

Connt.1	Connt.2	COLOR
1	1	RED
2	2	WHITE
3	3	GREEN
4	5	BLACK

4	P.V.C MOLDING 55P COLOR: BLACK		g
3	MINI USB 5PIN B TYPE MALE SHELL PLATED NICKEL CONTACT:G/F	1	Set
2	USB A TYPE MALE SHELL PLATED NICKEL CONTACT:G/F	1	Set
1	CABLE: UL2725 28/1P+24#/2C REV 2.0 JACKET COLOR:BLACK DD: 4.7±0.1mm		MM
NO.	DESCRIPTION	Q'TY	UNITS
A	CABLE REV2.0 USB AM TO MINI USB 5P		09/07/06
REV.	DESCRIPTION	DATE	

UNLESS OTHERWISE SPECIFIED TOLERANCE		 DUN CHENG TECH. CORP. TEL:886-2-26739970 FAX:886-2-26739980 DRAWN NAME: 威繪-RZCMT6100
SCALE: NONE	UNIT: mm	
DRAWN: GUOJING	09/07/06	
CHECKED: Xing Fa	09/07/06	
APPROVED: / /	PRODUCT NO.	
SIZE: A4	REV: A	FILE NAME: